PATENT COOPERATION TREATY

PCT

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

(Chapter II of the Patent Cooperation Treaty)

(PCT Article 36 and Rule 70)

Applicant's or agent's file P206350PCT AWE	/jdo	FOR FURTHER AC	CTION	See Form PCT/IPEA/416	
PCT/NL2004/000180 12.03.2004				Priority date (day/month/ye.	ar)
Applicant AB SKF et al.	ssification (IPC) or na	tional classification and IP	C		
,	and the train	sinited to the applicant	according to Afficie	his International Preliminary E 36.	Examining
		4 sheets, including thi			
		ANNEXES, comprising			
a. \to sent to th	e applicant and to	the International Burea	u) a total of 5 sheet	ts, as follows:	
Admi	nistrative Instruction	ns).	d by this Authority (amended and are the basis o see Rule 70.16 and Section 6	607 of the
	s which supersede nd the disclosure ir lemental Box.	e earlier sheets, but whi n the international applic	ch this Authority con ation as filed, as inc	nsiders contain an amendmen dicated in item 4 of Box No. I a	t that goes and the
		reau only) a total of (ind s related thereto, in cor sting (see Section 802		per of electronic carrier(s)) , on only, as indicated in the Super Instructions).	containing a pplemental
4. This report contain	ins indications rela	ting to the following iten	ns:		
⊠ Box No. I	Basis of the opinion	•			
0	Priority	//·		•	
	•	t of opinion with regard	to novelty inventive	step and industrial applicabil	
☐ Box No. IV	Lack of unity of inv	ention	to novelly, investible	step and industrial applicabil	ity
Box No. V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement					
☐ Box No. VI	Certain documents	s cited	., 5		
Box No. VII	The first of the f				
☐ Box No. VIII	Certain observatio	ns on the international a	application		
Date of submission of the o	demand		ate of completion of th	is report	
04.01.2005			8.01.2005		
preliminary examining auth	Name and mailing address of the international oreliminary examining authority:				Cal Palentes
European Patent Office - P.B. 5818 Patentlaan 2 NL-2280 HV Rijswijk - Pays Bas Tel. +31 70 340 - 2040 Tx: 31 651 epo nl Fax: +31 70 340 - 3016			an Prooijen, T elephone No. +31 70 3		
				TO:0100	We've saily .

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No. PCT/NL2004/000180

	Box No. I Basis of the repor	t		
1.	. With regard to the language, this report is based on the international application in the language in which filed, unless otherwise indicated under this item.			
	which is the language of a tild international search (und publication of the internation	nslations from the original language into the following language, translation furnished for the purposes of: der Rules 12.3 and 23.1(b)) ational application (under Rule 12.4) examination (under Rules 55.2 and/or 55.3)		
2.	With regard to the elements* of have been furnished to the receive port as "originally filed" and an	the international application, this report is based on (replacement sheets which eiving Office in response to an invitation under Article 14 are referred to in this re not annexed to this report):		
	Description, Pages			
	2-4	as originally filed		
	1, 1a	received on 04.01.2005 with letter of 04.01.2005		
	Claims, Numbers			
	1-7	received on 04.01.2005 with letter of 04.01.2005		
	Drawings, Sheets			
	1/4-4/4	as originally filed		
	a sequence listing and/or a	ny related table(s) - see Supplemental Box Relating to Sequence Listing		
3.	 □ The amendments have resulted in the cancellation of: □ the description, pages □ the claims, Nos. □ the drawings, sheets/figs □ the sequence listing (specify): □ any table(s) related to sequence listing (specify): 			
4.	☐ This report has been established as if (some of) the amendments annexed to this report and listed below had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)). ☐ the description, pages ☐ the claims, Nos. ☐ the drawings, sheets/ligs ☐ the sequence listing (specify): ☐ any table(s) related to sequence listing (specify):			
	* If item 4 applies, s	ome or all of these sheets may be marked "superseded."		

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY

International application No. PCT/NL2004/000180

Box No. V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)

Yes: Claims

No:

Inventive step (IS)

Claims Yes: Claims

1-7

1-7

Industrial applicability (IA)

No: Claims

Yes: Claims

1-7

No: Claims

2. Citations and explanations (Rule 70.7):

see separate sheet

INTERNATIONAL PRELIMINARY REPORT ON PATENTABILITY (SEPARATE SHEET)

International application No.

PCT/NL2004/000180

Re Item V

Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

Subject: forward- reverse control device

Closest prior art: GB-A-591 153 shows such a device having the features of the preamble of claim 1

Problem: to simplify the design. The known design uses a planetary carrier which is axially moved by the actuator

Solution: by the characterizing features of the independent claim. Although planetary gear arrangements in which the planetary gears are fixed to the housing are known, it would not seem to be obvious to arrive at such a construction starting from the prior art construction, since in order to have this feature many more alterations to the prior art are necessary.

Thus claim 1 and dependent claims 2 to 7 meet the requirements of Articles 33(2) and 33(3) PCT.

10

15

JC17 Rec'd PCT/PT 3 SEP 2005

Forward-reverse control device


1

The invention is related to a forward-reverse control device, comprising a housing, a rotatable input member, a rotatable output member, a planetary gear set for reversing the input rotation, as well as selector means for selectively connecting the input member and the output member directly or through the gear set, wherein the selector means are driveable by means of an electric actuator.

Such a forward-reverse control is disclosed in GB-A-591153. The planetary gear set thereof is mounted on a rotatable planet carrier.

The object of the invention is to provide a forward-reverse control which is of a simpler design. Said object is achieved in that each satellite gear of the planetary gear set is rotatably connected with respect to the housing, said housing furthermore supporting the screw mechanism and the electric motor.

The actuator may comprise an electric/mechanical converter for converting rotational motion into linear motion, e.g. a ball/screw mechanism connected to an electric motor. The ball screw mechanism may be a friction screw, a ball screw or a roller screw mechanism.

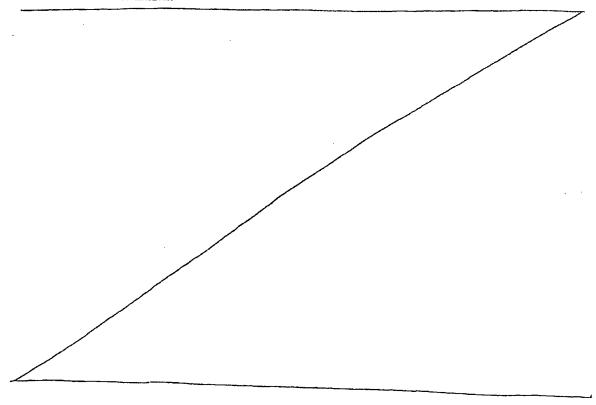

15

25

10/549254 JC17 Rec'd PCT/PTO 13 SEP 2005

Forward-reverse control device

The invention is related to a forward-reverse control device, comprising a housing, a rotatable input member, a rotatable output member, a gear set for reversing the input rotation, as well as selector means for selectively connecting the input member and the output member directly or through the gear set.

Such a forward-reverse control device is known. It can for instance be applied in an automotive vehicle driveline including a continuously variable transmission. The object of the invention is to provide an improved independent forward-reverse control mechanism which can be applied in connection with drive-by-wire applications, in particular in connection with a drive-by-wire continuously variable transmission. The CVT by wire transmission may incorporate, apart from the forward reverse control by wire, also a disc variator by wire, clutch by wire with or without integrated starter generator, a differential with or without traction control and also a parking by wire control.

Said object is achieved in that the selector means are driveable by means of an electric actuator. Said actuator comprises an electric/mechanical converter for converting rotational motion into linear motion, e.g. a ball/screw mechanism connected to an electric motor. The ball screw mechanism may be a friction screw, a ball screw or al roller screw mechanism.

Preference is given to an embodiment in which each satellite gear of the planetary gear set is rotatably connected with respect to the housing, said housing furthermore supporting the screw mechanism and the electric motor. The selector means may comprise a toothed selector wheel which is displaceable in axial direction, a first counter wheel which is connected to the input member, a second counter wheel which is connected to the output member, as well as a third counter wheel which is connected to the ring gear of the planetary gear set and which is positioned between the first and the second counter wheel when seen in axial direction, said selector wheel being displaceable between a first position engaging both the third and the first counter

10

JC17 Rec'd PCT/PTO 13 SEP 2005


EPO-DG 1 10/549254

5

Claims

04. 01. 2005

1. Forward-reverse control device, comprising a housing (1), a rotatable input member (4), a rotatable output member (2), a planetary gear (10) set for reversing the input rotation, as well as selector means (6-8, 15) for selectively connecting the input member (4) and the output member (2) directly or through the gear set (10), wherein the selector means (6-8, 15) are driveable by means of an electric actuator (16, 17, 21-24), characterized in that each satellite gear (25) of the planetary gear set (10) is rotatably connected with respect to the housing (1), said housing (1) furthermore supporting the screw mechanism (16) and the electric motor (24).

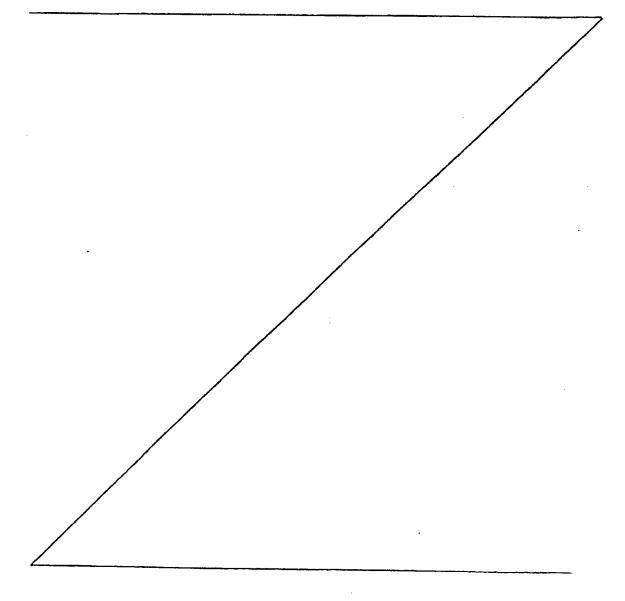


: 3

5

25

30

EPO - DG



- 1. Forward-reverse control device, comprising a housing (1), a rotatable input member (4), a rotatable output member (2), a gear set (10) for reversing the input rotation, as well as selector means (6-8, 15) for selectively connecting the input member (4) and the output member (2) directly or through the gear set (10), characterized in that the selector means (6-8, 15) are driveable by means of an electric actuator (16, 17, 21-24).
- 2. Device according to claim 1, wherein the electric actuator comprises an electric/mechanical converter for converting rotational motion into linear motion, e.g. a ball/screw mechanism (16) connected to an electric motor (24).
- 3. Device according to claim 2, wherein the linear screw mechanism (16) is a friction screw, a ball screw or al roller screw mechanism.
- 4. Device according to any of the preceding claims, the gear set is a planetary gear set (10), wherein each satellite gear (25) of the planetary gear set (10) is rotatably connected with respect to the housing (1), said housing (1) furthermore supporting the 20 screw mechanism (16) and the electric motor (24).
 - Device according to believe the preceding claim.

 Device according to believe the selector means (6-8, 15) comprises a toothed selector gear wheel (15) which is displaceable in axial direction, a first counter gear wheel (7) which is connected to the input member (4), a second counter gear wheel (6) which is connected to the output member (2), as well as a third counter gear wheel (8) which is connected to the ring gear (9) of the planetary gear set (10), the second counter gear wheel (6) being positioned between the first (7) and the third counter gear wheel (8) when seen in axial direction, said selector gear wheel (15) being displaceable between a first position engaging both the second (6) and the first (7) counter gear wheel, and a second position engaging the second (6) and the third (8) counter gear wheel.

10

6. Device according to claim 8, wherein the screw (17) of the screw mechanism (16) is rotatably supported with respect to two axially spaced support rings (18, 19), said support rings (18, 19) each being suspended with respect to the housing (1) by means of suspension rods (20) extending between the ring gear (9) and the sun gear (12) of the satellite gear set (10), and the nut (21) of the screw mechanism (16) is connected to the selector wheel (15).

J. Device according to claim \$ or 6, wherein synchronizer mechanisms (13, 14) are provided between the second (6) and the first (6) counter wheel as well as between the second (6) and the third (8) counter wheel.

7 5 6 8. Device according to claim $\hat{\beta}$, $\hat{\delta}$ or $\hat{\ell}$, wherein the input member (4) is connected to the sun wheel (12), and the third counter wheel (8) is connected to the ring gear (9) of the satellite gear set (10).